



AMETEK
LAMB ELECTRIC

Product Bulletin


Model: 117319-00

DESCRIPTION

- One stage
- 120 volts
- 5.1"/130 mm diameter
- Double ball bearings
- Single speed
- Thru flow discharge
- Thermoset fan end bracket
- Aluminum commutator bracket

DESIGN APPLICATION

- Equipment operating in environments not requiring separation of working air from motor ventilating air
- Designed to handle clean, dry, filtered air only

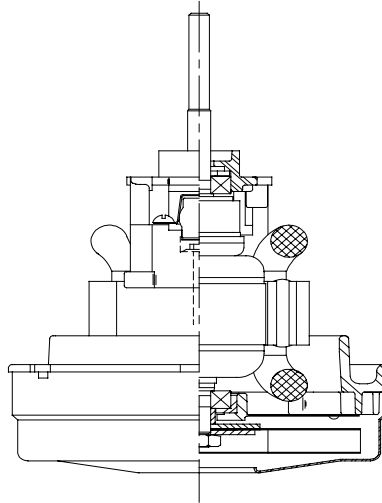


SPECIAL FEATURES


- Suitable for 120 volt AC operation, 50/60 Hz
- UL recognized, category PRGY2 (E47185)
- CSA certified, class 1611 01 (LR31393)
- Provision for grounding
- Skeleton frame design
- Tapered fan system
- High airflow fan system
- The Lamb vacuum motor line offers a wide range of performance levels to meet design needs

TYPICAL MOTOR PERFORMANCE.*

(At 120 volts, 60Hz, test data is corrected to standard conditions of 29.92 Hg, 68° F.)

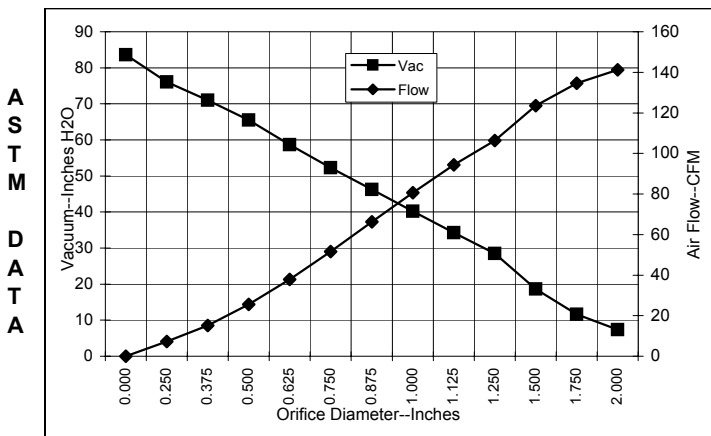

Orifice (Inches)	Amps	Watts (In)	RPM	Vac (In.H ₂ O)	Flow (CFM)	Air Watts
2.000	11.6	1334	23648	7.4	141.3	124
1.750	11.5	1330	23712	11.6	134.6	184
1.500	11.4	1320	23852	18.6	123.5	270
1.250	11.1	1285	24218	28.5	106.4	356
1.125	10.8	1251	24602	34.3	94.4	381
1.000	10.4	1201	25176	40.2	80.6	381
0.875	9.8	1137	25948	46.2	66.2	359
0.750	9.1	1063	26980	52.3	51.6	317
0.625	8.4	978	28232	58.7	37.9	262
0.500	7.6	894	29688	65.5	25.5	196
0.375	7.0	826	30934	71.0	15.1	126
0.250	6.6	778	32152	76.1	7.2	64
0.000	6.2	737	33102	83.6	0.0	0

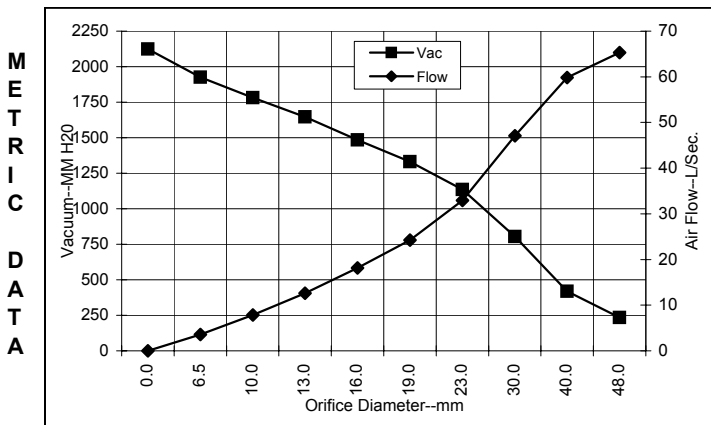

Orifice (mm)	Amps	Watts (In)	RPM	Vac (mm H ₂ O)	Flow (L/Sec)	Air Watts
48.0	11.5	1332	23676	235	65.3	150
40.0	11.5	1323	23810	419	59.9	244
30.0	11.0	1266	24429	805	47.1	370
23.0	10.0	1153	25755	1135	32.9	365
19.0	9.1	1061	27005	1332	24.2	316
16.0	8.4	981	28182	1484	18.1	264
13.0	7.7	902	29542	1646	12.6	203
10.0	7.1	836	30747	1782	7.9	137
6.5	6.6	780	32091	1926	3.6	67
0.0	6.2	737	33102	2123	0.0	0

Note: Metric performance data is calculated from the ASTM data above.


* Data represents performance of a typical motor sampled from a large production quantity. Individual motor data may vary to normal manufacturing variations.

Test Specs:	120 volts	Minimum Sealed Vacuum:	75.0"	ORIFICE:	7/8 "	Minimum Vacuum:	42.0"	Maximum Watts:	1280
--------------------	------------------	-------------------------------	--------------	-----------------	--------------	------------------------	--------------	-----------------------	-------------

DIMENSIONS

NOTES:

1. LEADS: 18GA STRANDED, LEADS CAN BE ANY COLOR EXCEPT GREEN OR GREEN WITH YELLOW STRIPE.
2. GROUNDING OR EARTHING PROVISIONS: USE HOLES AS INDICATED FOR GROUNDING OR EARTHING. REFER TO APPROPRIATE LISTING OR REGULATORY AGENCY FOR PROPER METHOD OF GROUNDING OR EARTHING.

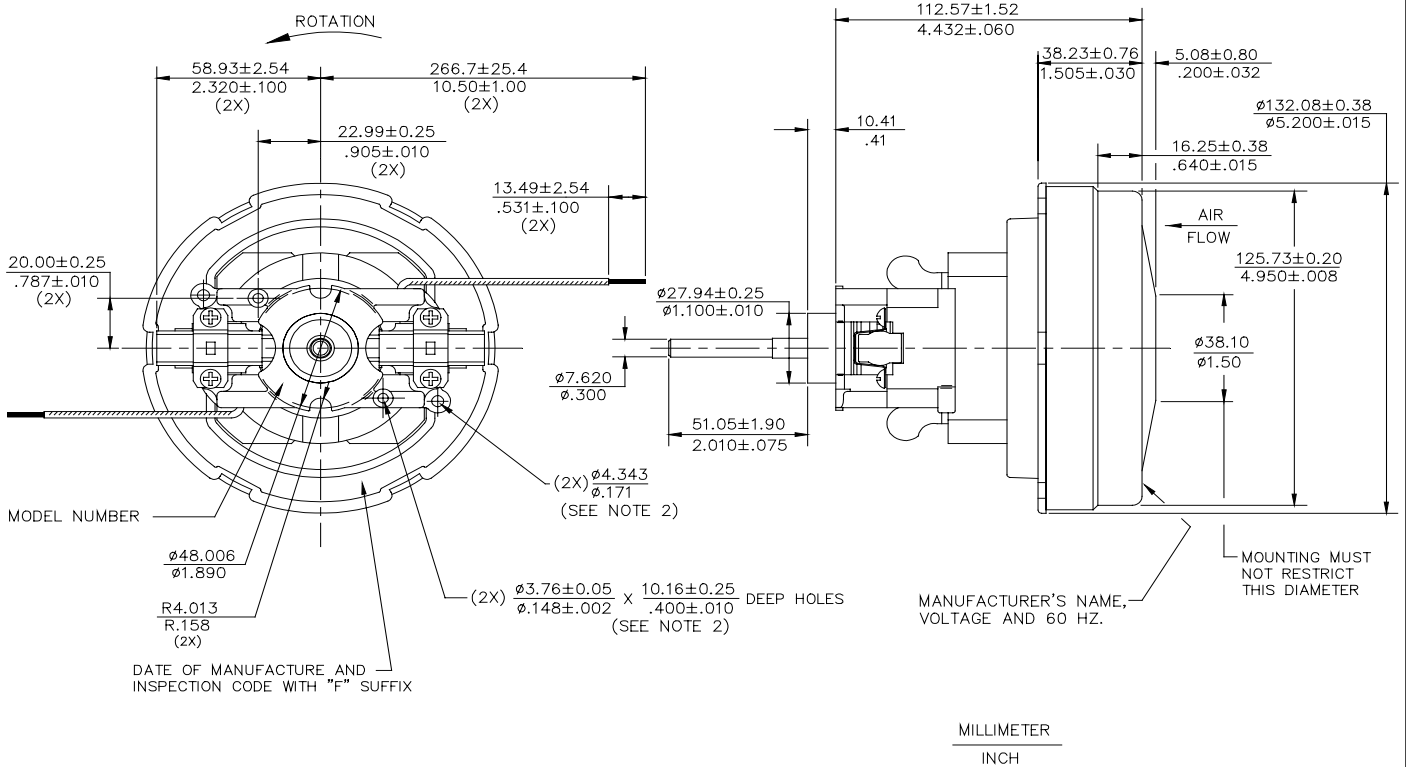

IMPORTANT NOTE: Pictorial and dimensional data are subject to change without notice. Contact factory for current revision levels.

WARNING - Ametek/Lamb Electric thru-flow vacuum motors must never be used in applications in which wet or moist conditions are involved, where dry chemicals or other volatile materials are present or where airflow may be restricted or blocked. Such motors are designed to permit the vacuumed air to pass over the electrical winding to cool it. Thus any foam, liquid (including water), dry chemical or other foreign substance will come in contact with electrical conductors which could cause combustion (depending on volatility) or electrical shock. Failure to observe these precautions could result in property damage and severe personal injury, including death in extreme cases. All applications incorporating Lamb motors should be submitted to Underwriters Laboratories Inc. or other appropriate organizations or agencies for testing specifically related to the safety of your equipment.

AMETEK/Lamb Electric Division
 627 Lake Street
 Kent, Ohio 44240
 U.S.A.
 Tel: (330) 673-3451
 Fax: (330) 673-8994

Ametek GmbH
 P. O. Box 1251
 D-71667 Marbach
 Germany
 Phone: + 49-714-484-9512
 Fax: + 49-714-484-9513

AMETEK/Singapore Private Limited
 10 Ang Mo Kio Street 65
 # 05-12 Techpoint
 Singapore 2056
 Tel: + 65-484-2388
 Fax: + 65-481-6588